


caprihans
INDIA LIMITED

Quality packaging solutions....for decades

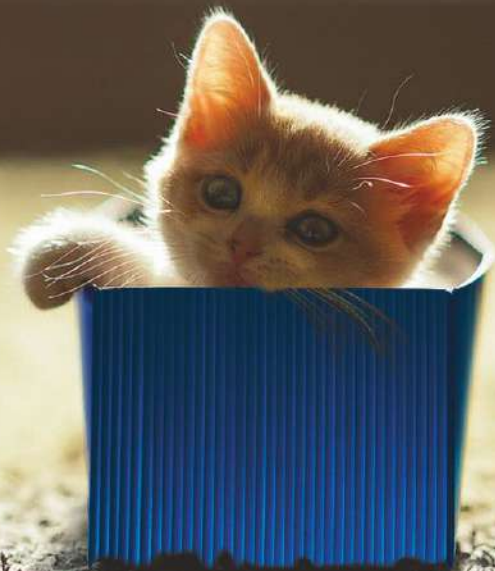

Uniqueness in Utility.

Sunpac
Flute Board



Sunpac Flute Board

Sunpac Plastic Corrugated Boards are extensively used in the advertising industry for POP displays, danglers, light diffusers, folio cases, etc.

They are also useful for packaging on account of their light weight and good printability and natural cushioning. Particularly useful for multi-use reusable packaging.

ISO 9001:2008

Applications:

- POP's, Danglers, Display Boards,
- Floor Protection, Exhibition Panels, False Ceilings, Roof-lining, Scaffolding
- Storage Bins, Material Handling Boxes, Multi-use Cartons, Cable Packing

Technical Information:

Thickness	2mm – 6mm
Width	Upto 1300mm
Colours	Wide range of colours

Specification For Sunpac - Hollow Corrugated Board.

SR.No.	PROPERTY	THICKNESS				
		2.5mm	3mm	4mm	5mm	6mm
1	Average Grammage / Sq. Mtr.	400 +/- 10	400 +/- 15	600 +/- 20	700 +/- 30	1000 +/- 50
2	Width	As per requirement (Maximum possible - 1300 mm + 10 mm, - 0 mm)				
3	Length	As per requirement (Maximum possible - 2440 mm + 20 mm, - 0 mm)				
4	Breaking Strength (Min.) Longitudinal (L)	125 N	150 N	190 N	210 N	240 N
	Transverse (T)	75 N	95 N	115 N	130 N	150 N
5	Elongation (Min.) Longitudinal (L)	200%	150%	125 %	100 %	75%
	Transverse (T)	75%	75%	50%	50%	25%
6	Bursting Strength (Min.) Kg./ cm ²	10	11	13	15	17
7	Surface Treatment	Minimum 40 Dynes By Corona Discharge.				

Characteristics of Sunpac corrugated boards:

- Light weight
- Water proof
- Good printability
- High Tear strength to weight ratio & rigidity to weight ratio.
- Chemical resistance
- Non Corrosive
- Long lasting
- Excellent dimensional stability
- Thickness from 2mm to 6mm
- UV stability (optional), Antistatic Property (optional)



All information provided in this leaflet is in good faith and to the best of our current knowledge. However we shall not be liable for any loss due to the usage of this information.